


**GENERAL NOTES**

**HOMEOWNER COORDINATION:**

1. RIGHT-OF-ENTRY (ROE) IS REQUIRED PRIOR TO ENTRY OF ANY PRIVATELY OWNED PROPERTY TO DO WORK. ROE WILL BE SECURED AND PROVIDED BY THE TOWN.
2. CONTRACTOR SHALL WORK WITH TOWN TO ADDRESS COMMUNICATIONS TO TOWN CUSTOMERS WHICH INCLUDES BUT IS NOT LIMITED TO:
  - a. CONTRACTOR TO FIRST NOTIFY EACH HOMEOWNER OF WORK SCHEDULED AT THEIR PROPERTY 2 WEEKS PRIOR.
  - b. CONTRACTOR TO SEND REMINDER NOTIFICATION TO EACH HOMEOWNER AT LEAST 3 DAYS PRIOR TO WORK.
3. ENSURE COMPANY VEHICLES, UNIFORMS, AND OTHER SIGNAGE TO IDENTIFY CONTRACTORS IS PRESENT FOR HOMEOWNERS.

**PROJECT CONSIDERATIONS:**

1. CONTRACTOR SHALL FOLLOW ALL AWWA STANDARDS FOR SERVICE LINE REPLACEMENT INCLUDING AWWA C800-21 UNDERGROUND SERVICE LINE VALVES AND FITTINGS AND AWWA C810-17 REPLACEMENT AND FLUSHING OF LEAD SERVICE LINES. CONTRACTOR TO FOLLOW THESE STANDARDS FOR ALL PIPE MATERIAL TYPES.
2. CONTRACTOR SHALL FOLLOW ALL GUIDELINES OF THE UNIFORM PLUMBING CODE DURING INSTALLATION.
3. COMPLIANCE WITH NSF/ANSI 61 IS REQUIRED.
4. REPLACEMENT OF LEAD AND GALVANIZED STEEL SERVICE LINES MUST BE MADE FROM NEWLY INSTALLED METER PIT (WORK DONE BY OTHERS AS A PART OF WHEATLAND DRINKING WATER SYSTEM IMPROVEMENTS PROJECT) TO PREMISE PLUMBING OF HOME. CONTRACTOR MUST COORDINATE WITH CONTRACTOR SELECTED FOR WHEATLAND DRINKING WATER SYSTEM IMPROVEMENTS PROJECT TO DETERMINE SEQUENCING OF SERVICE LINE REPLACEMENTS.
5. CONTRACTOR MUST ALSO COORDINATE THE TERMINATION POINT OF WORK DONE BY OTHERS TO DETERMINE START OF WORK ON IDENTIFIED SERVICE LINES.
6. CONTRACTOR MUST PROVIDE A SUBMITTAL FOR ALL MATERIALS USED TO BE APPROVED BY ENGINEER.
7. ALL PROPERTY DISTURBED BY CONSTRUCTION SHALL BE RESTORED, INCLUDING SEEDING FOR GRASS AREAS ON THE PROPERTY AS WELL AS INTERIOR PORTIONS OF ANY BUILDING ON THE PROPERTY DISTURBED BY WORK.
8. DISPOSE OF ALL LEAD SERVICE LINES IN A SAFE MANNER.

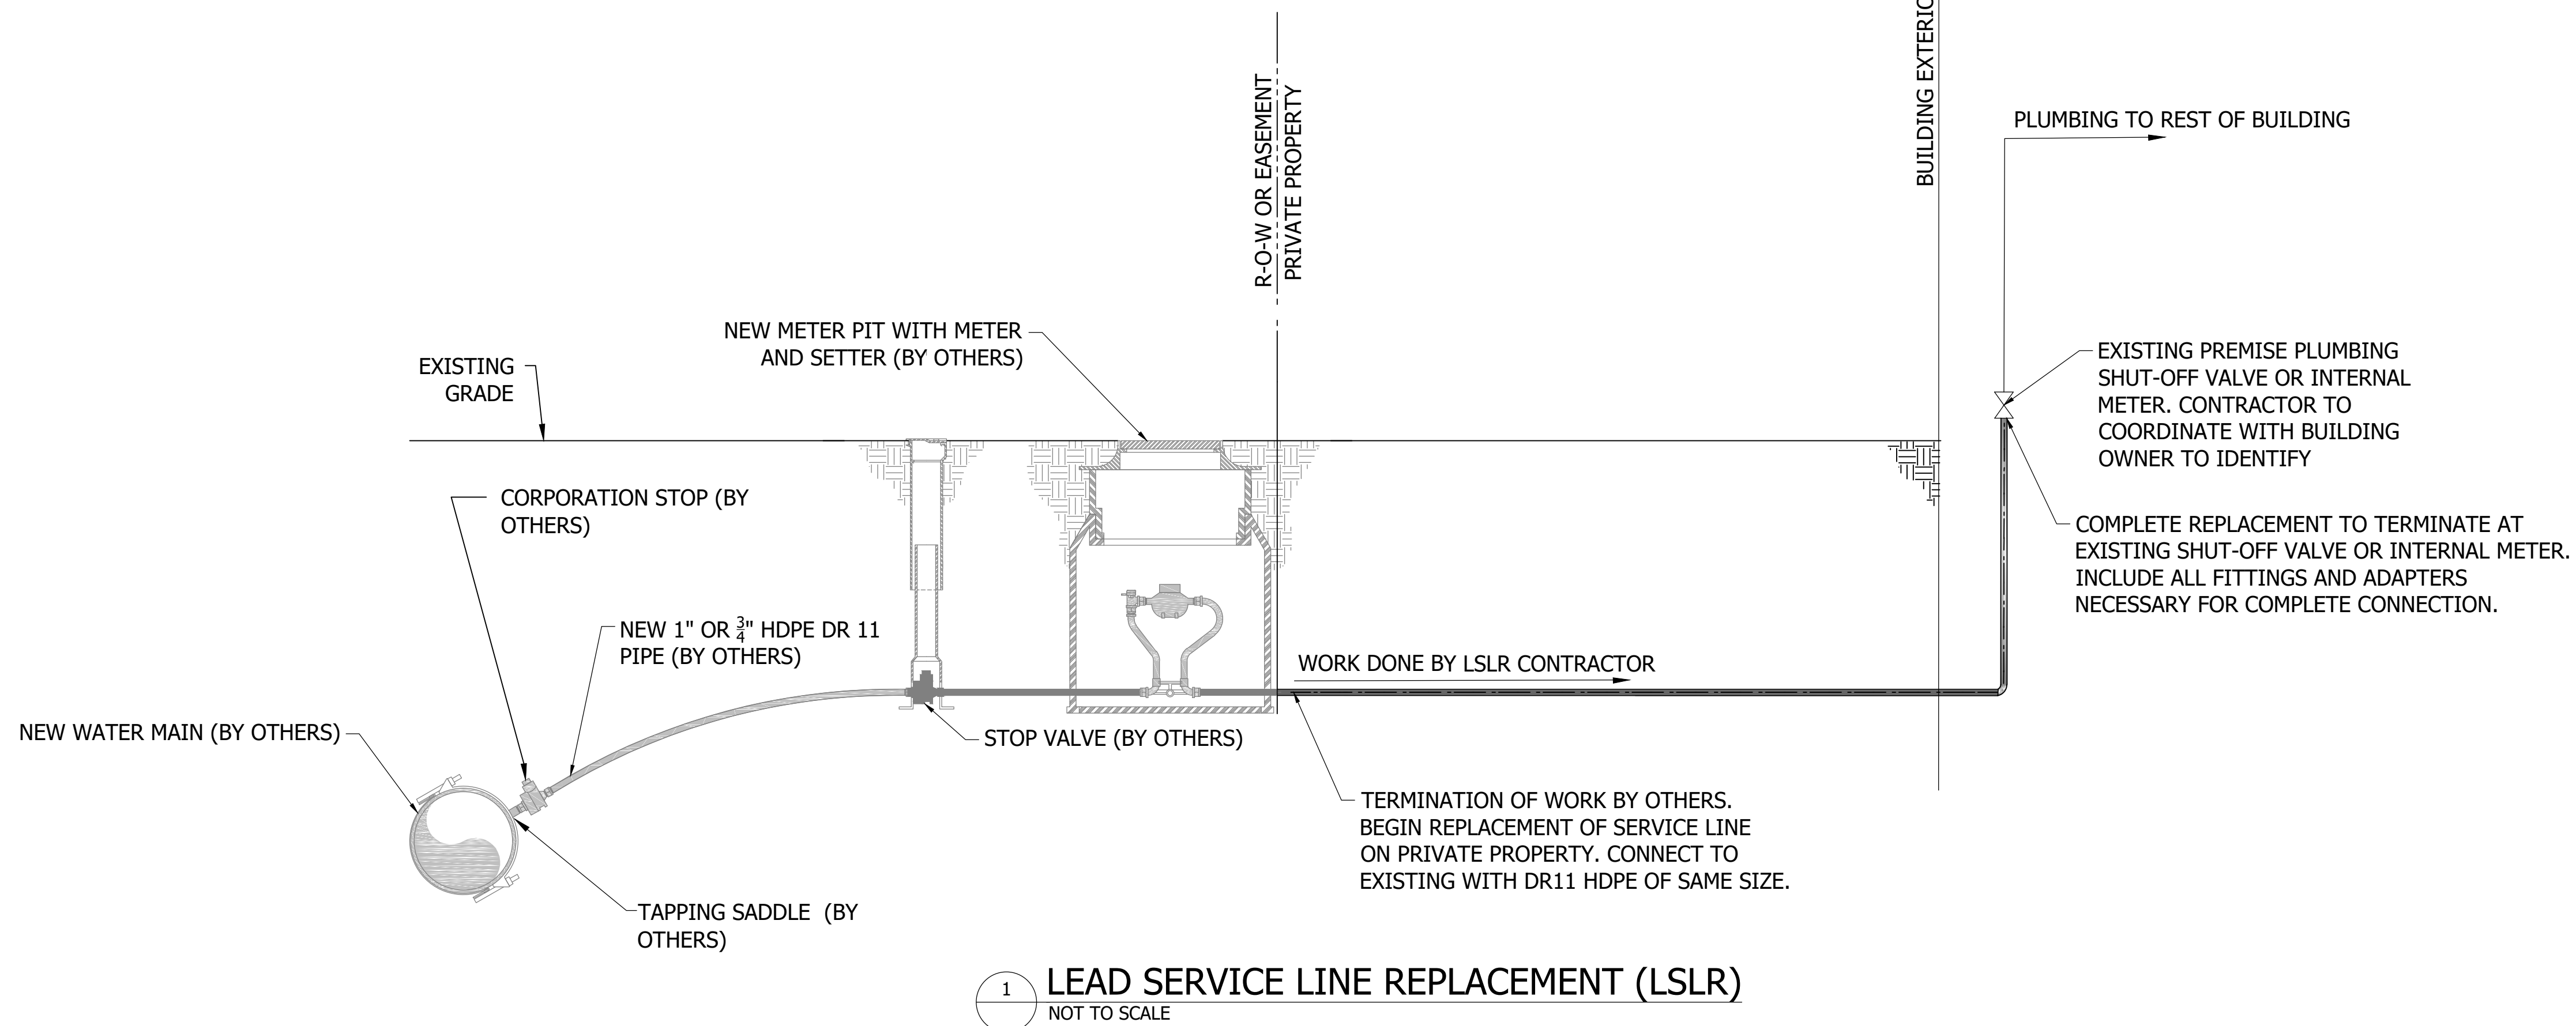

**1 LEAD SERVICE LINE REPLACEMENT (LSLR)**  
NOT TO SCALE

**WHEATLAND LEAD SERVICE  
LINE REPLACEMENTS**

WHEATLAND, IN 47597

#	Revision	Date

Project #: 21-400-196-2

Designed By: WMW

Drawn By: WMW

Checked By: ALC

Date: 4/5/2022



*Aaron Crow*

**LEAD SERVICE LINE  
REPLACEMENT**

**C100**

PRINT DATE: 4/4/22 PLOT SCALE: 1:186.91 EDIT DATE: 4/4/22 - 9:59 AM EDITED BY: WMEIDENBENNER DRAWING FILE: P:\21-400-196-2 WHEATLAND DRINKING WATER SYSTEMS ACAD\PLAN SHEETS & WORKING DRAWINGS\C100 - LSLR DETAILS.DWG